




# INSTALLATION STEPS

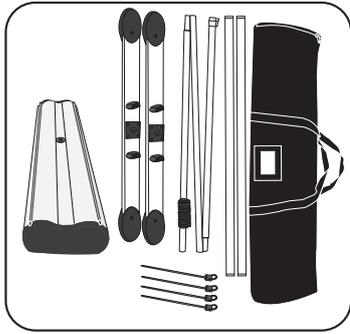


- 1** The box contains:
- A carry bag
  - Clamp top bar
  - Support pole
  - The base




- 2** Remove the plastic end caps from the clamp top bar.




- 3** Open the top bar and fully insert the banner.

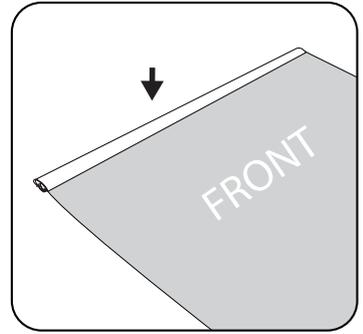


- 4** Press down firmly on clamp top bar to secure graphic into place.

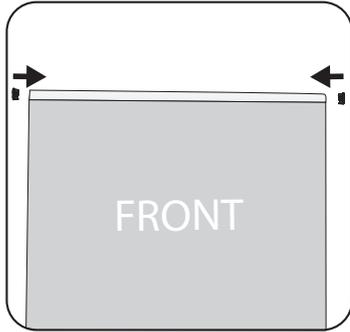


- 5** Place the plastic end caps back onto the top bar. Repeat for additional graphic.

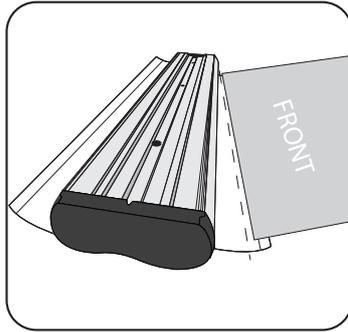


- 6** Peel the paper off the adhesive along the edge of the leader. Ensure the bottom of the banner is straight along the adhesive, and attach the banner (front facing up).

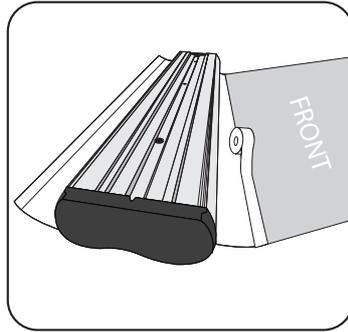


- 7** Secure the banner to the leader with additional tape on both sides. Repeat steps 7-8 for additional graphic.

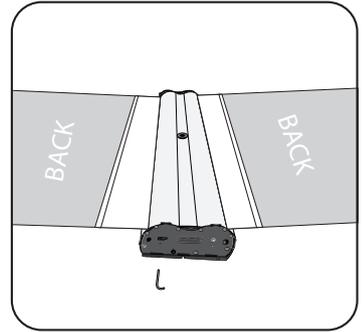

- 8** Remove both end caps to expose the locking pins. The locking pin controls the tension of the banner it is closest to.

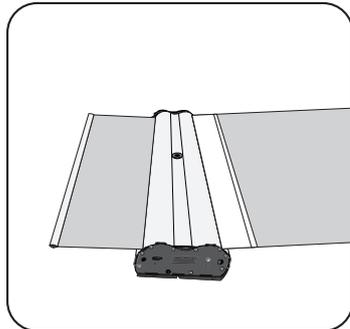

- 9** Gripping the banner securely by the top bar with one hand, remove the locking pin closest to the banner you are wishing to retract from the base.

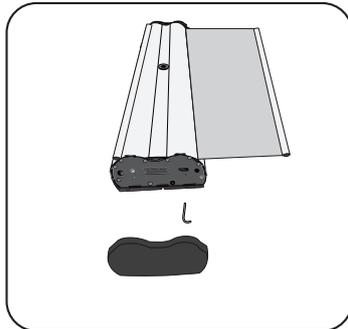


- 10** Repeat for additional graphic. Place end caps back onto the base.




When done installation, leave lower portion of this sheet with the stand for the end user




## SET-UP STEPS

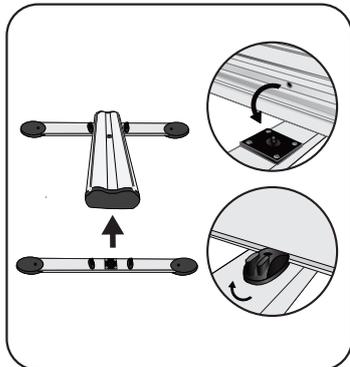


- 1** Align the hole on the bottom of the base unit to the post on the center of the foot. Turn each knob clockwise to lock foot into place on base unit. Repeat for second support foot.

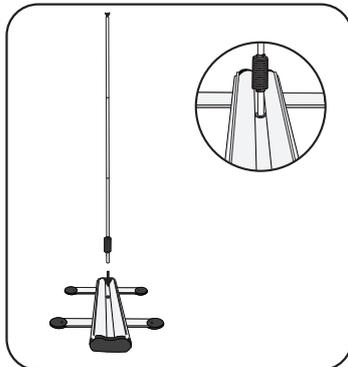

- 2** Assemble pole and insert the bottom of the pole in the center of the base.

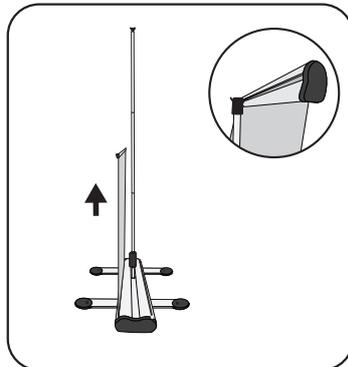

- 3** Gripping the top bar pull the banner upwards. Tilt the top bar back on a slight angle to position the fitting at the top of the pole into the channel in the center of the top bar. Repeat for additional graphic.

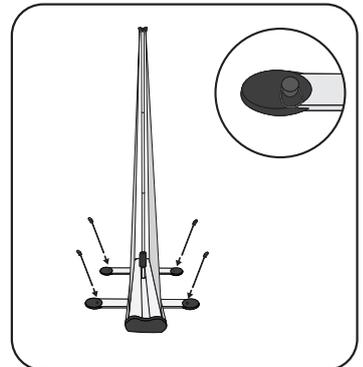

- 4** If displaying outside, base can be secured on soft by placing the stakes through the holes found on the ends of the support feet.

### IMPORTANT:

When disassembling display, tilt the clamp top bar back on a slight angle and lift off the top off the pole, then while holding the clamp top bar, carefully and slowly allow the banner to retract straight into the base, ensuring it does not wander over to either side while it is retracting.